

## CHANNEL FUNCTION

### ALPHA PROFILE 1500


**NB: To prevent accidental breakage of the effects, which could collide with each other during transport, before switching the projector OFF check that all the projector Channels have been excluded (DMX level = 0%).**

CHANNEL	CHANNEL MODE	
	STANDARD	VECTOR
1	CYAN	CYAN
2	MAGENTA	MAGENTA
3	YELLOW	YELLOW
4	C.T.O	C.T.O
5	COLOUR WHEEL	COLOUR WHEEL
6	MACRO COLOURS	MACRO COLOURS
7	STOP/STROBE	STOP/STROBE
8	DIMMER	DIMMER
9	DIMMER FINE	DIMMER FINE
10	IRIS	IRIS
11	STATIC GOBO CHANGE	STATIC GOBO CHANGE
12	ROTATING GOBO CHANGE	ROTATING GOBO CHANGE
13	GOBO ROTATION	GOBO ROTATION
14	GOBO FINE	GOBO FINE
15	ROTATING PRISM CHANGE	ROTATING PRISM CHANGE
16	PRISM ROTATION	PRISM ROTATION
17	FROST INSERTION	FROST INSERTION
18	BLADE UP1	BLADE UP1
19	BLADE UP2	BLADE UP2
20	BLADE DW1	BLADE DW1
21	BLADE DW2	BLADE DW2
22	BLADE RG1	BLADE RG1
23	BLADE RG2	BLADE RG2
24	BLADE LF1	BLADE LF1
25	BLADE LF2	BLADE LF2
26	FRAMING ROTATION	FRAMING ROTATION
27	FOCUS	FOCUS
28	FOCUS FINE	FOCUS FINE
29	ZOOM	ZOOM
30	AUTOFOCUS DISTANCE	AUTOFOCUS DISTANCE
31	AUTOFOCUS ADJUSTMENT	AUTOFOCUS ADJUSTMENT
32	MACRO EFFECTS	MACRO EFFECTS
33	PAN	PAN
34	PAN FINE	PAN FINE
35	TILT	TILT
36	TILT FINE	TILT FINE
37	FUNCTION	FUNCTION
38	RESET	RESET
39	LAMP CONTROL (with Option "Lamp DMX" ON)	LAMP CONTROL (with Option "Lamp DMX" ON)
40		PAN-TILT TIME
41		COLOUR TIME
42		BEAM TIME
43		GOBO TIME

NOTE: On conclusion of resetting in case of absence of DMX signal, Pan & Tilt move to the "Home" position (Pan 128 bit - Tilt 128 bit) all the others channels stay at 0 bit.

• COLOUR MIXING - channel 1 - 2 - 3


Operation with option color mixing: RGB

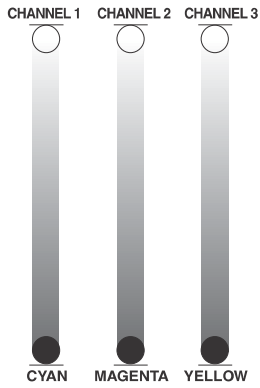

BIT	EFFECT
255	COLOUR EXCLUDED
0	COLOUR INSERTED

**IMPORTANT:** The lamp dim to half power 1 second after all the 3 channels stay at 0 bit level. The lamp goes back to full power when the channels level is put higher than 0 bit.

Operation with option color mixing: CMY

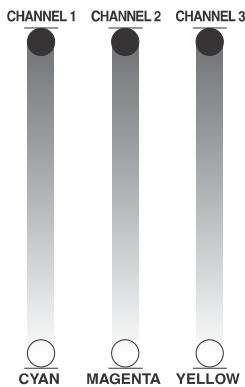

BIT	EFFECT
255	COLOUR INSERTED
0	COLOUR EXCLUDED

**IMPORTANT:** The lamp dim to half power 1 second after all the 3 channels stay at 255 bit level. The lamp goes back to full power when the channels level is put lower than 255 bit.

• C.T.O. - channel 4



BIT	EFFECT
255	FILTER INSERTED
0	FILTER EXCLUDED

• COLOUR WHEEL - channel 5



BIT	EFFECT
255	FAST ROTATION 160 rpm
128	SLOW ROTATION 0,2rpm
117	BLUE
97	ORANGE
77	AQUAMARINE
58	GREEN
39	PINK
20	RED
0	WHITE

• MACRO COLOURS - channel 6

COLOR NAME	BIT	ROSCO CODE	LEE CODE	CYAN BIT	MAGENTA BIT	YELLOW BIT	CTO BIT	WHEEL BIT
Unused Range	148-255	-	-	-	-	-	-	-
Half CT straw	146-147	442	442	0	0	34	190	0
Lighter blue	144-145	353	353	226	0	149	138	0
Glacier blue	142-143	352	352	220	0	129	138	0
Fuschia pink	140-141	345	345	109	186	77	120	0
Mallard green	138-139	325	325	255	0	0	236	58
Jade	136-137	323	323	127	0	162	0	77
3/4 CT Orange	134-135	285	285	0	36	61	217	0
3/4 CTB	132-133	281	281	85	79	87	54	0
Half minus green	130-131	248	248	60	19	86	75	39
Minus green	128-129	247	247	60	71	86	75	39
1/4 CTO	126-127	206	206	62	71	123	122	0
1/2 CTO	124-125	205	205	25	26	45	131	0
Full CT Orange	122-123	204	204	0	44	58	234	0
1/4 CTB	120-121	203	203	75	54	91	109	0
1/2 CTB	118-119	202	202	85	71	84	89	0
Full CTB	116-117	201	201	94	79	80	0	0
Alice Blue	114-115	197	197	236	51	0	205	0
Congo Blue	112-113	181	181	251	241	0	255	0
Dark Lavender	110-111	180	180	195	170	0	160	0
Chrome Orange	108-109	179	179	0	98	255	255	0
Lagoon blue	106-107	172	172	224	0	121	40	79
Deep Lavender	104-105	170	170	100	129	77	120	0
Lilac tint	102-103	169	169	41	59	39	120	0
Daylight Blue	100-101	165	165	210	73	105	88	0
Flame red	98-99	164	164	0	255	227	255	97
Bastard amber	96-97	162	162	0	26	0	199	0
Deep Orange	94-95	158	158	0	148	255	255	0
Pink	92-93	157	157	0	159	0	255	0
Pale rose	90-91	154	154	0	48	0	189	0
Pale Gold	88-89	152	152	0	60	98	138	0
Bright rose	86-87	148	148	0	255	0	255	0
Apricot	84-85	147	147	0	81	55	255	0
Bright Blue	82-83	141	141	182	0	99	92	77
Primary green	80-81	139	139	0	0	0	231	58
Light green	78-79	121	121	0	0	255	0	77
Pale green	76-77	138	138	105	0	179	100	0
Special Lavender	74-75	137	137	97	105	72	90	0
Pale Lavender	72-73	136	136	73	102	44	120	0
Deep golden amber	70-71	135	135	0	255	255	255	0
Golden amber	68-69	134	134	0	142	234	110	0
Medium blue	66-67	132	132	255	152	127	0	77
Marine blue	64-65	131	131	60	0	106	73	77
Bright pink	62-63	128	128	0	255	0	197	0
Mauve	60-61	126	126	0	255	0	255	74
Fern Green	58-59	122	122	173	0	235	89	0
Leaf green	56-57	121	121	136	0	241	64	0
Deep Blue	54-55	120	120	255	229	58	128	77
Dark blue	52-53	119	119	255	161	0	0	77
Light blue	50-51	118	118	245	0	145	138	0
Steel blue	48-49	117	117	167	0	141	165	0
Medium blue green	46-47	116	116	189	0	157	91	77
Peacock blue	44-45	115	115	136	0	128	91	77
Dark pink	42-43	111	111	0	139	0	220	0
Light Salmon	40-41	109	109	50	121	58	230	0
English rose	38-39	108	108	0	62	0	247	0
Light rose	36-37	107	107	0	95	0	220	0
Primary red	34-35	106	182	0	0	0	0	20
Orange	32-33	105	105	0	182	255	76	0
Deep amber	30-31	104	104	0	26	199	223	0
Straw	28-29	103	103	58	17	104	176	0
Light amber	26-27	102	102	0	0	171	193	0
Yellow	24-25	101	101	0	0	255	149	0
Spring yellow	22-23	100	100	80	0	227	157	0
Dark Yellow Green	20-21	90	90	255	0	255	204	0
Lime green	18-19	88	88	118	0	241	124	0
Just Blue	16-17	79	79	255	77	0	204	0
Tokyo Blue	14-15	71	71	255	255	0	180	77
Sky blue	12-13	068	068	245	77	64	173	0
Pale blue	10-11	063	063	122	0	112	127	0
Lavender	8-9	058	058	165	186	77	0	0
Bright Red	6-7	026	026	0	255	0	255	21
Med Yellow	4-5	010	010	48	0	239	115	0
Med bastard amber	2-3	004	004	0	62	78	159	0
Random Macro Color (only for Macro effects)	1	-	-	-	-	-	-	-
Unused Range	0	-	-	-	-	-	-	-

• STOP / STROBE - channel 7



BIT	EFFECT
252 - 255	OPEN
239 - 251	RANDOM FAST STROBE
226 - 238	RANDOM MEDIUM STROBE
213 - 225	RANDOM SLOW STROBE
208 - 212	OPEN
207	FAST PULSATION
...	...
108	SLOW PULSATION
104 - 107	OPEN
103	FAST STROBE (12 flash/sec)
...	...
4	SLOW STROBE (1 flash/sec)
0 - 3	CLOSED

**IMPORTANT:** The lamp dim to half power 1 second after the channel stay at 0 bit level. The lamp goes back to full power when the channel level is put higher than 0 bit.

• DIMMER - channel 8



BIT	EFFECT
255	
...	...
0	


The lamp is linearly dimmed from full power to half power electronically and mechanically from half power to off.

• DIMMER FINE - channel 9




BIT	EFFECT
255	
...	...
0	

• IRIS - channel 10



BIT	EFFECT
252 - 255	MAXIMUM APERTURE
251	FAST PULSATION, FAST CLOSING
...	...
212	SLOW PULSATION, FAST CLOSING
211	FAST PULSATION, FAST OPENING
...	...
172	SLOW PULSATION, FAST OPENING
171	FAST PULSATION
...	...
132	SLOW PULSATION
128 - 131	MAXIMUM APERTURE
...	...
0	MINIMUM APERTURE

• STATIC GOBO CHANGE - channel 11

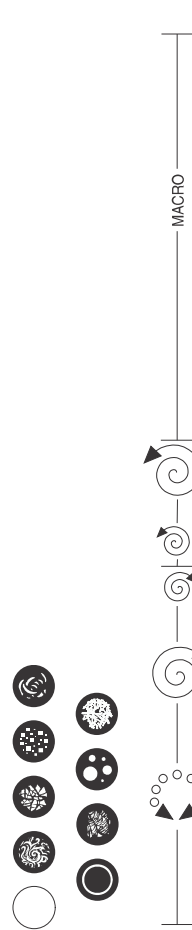

BIT	EFFECT
255	GOBO 8 SHAKE, FAST SPEED
...	...
244	GOBO 8 SHAKE, SLOW SPEED
243	GOBO 7 SHAKE, FAST SPEED
...	...
232	GOBO 7 SHAKE, SLOW SPEED
231	GOBO 6 SHAKE, FAST SPEED
...	...
220	GOBO 6 SHAKE, SLOW SPEED
219	GOBO 5 SHAKE, FAST SPEED
...	...
208	GOBO 5 SHAKE, SLOW SPEED
207	GOBO 4 SHAKE, FAST SPEED
...	...
196	GOBO 4 SHAKE, SLOW SPEED
195	GOBO 3 SHAKE, FAST SPEED
...	...
184	GOBO 3 SHAKE, SLOW SPEED
183	GOBO 2 SHAKE, FAST SPEED
...	...
172	GOBO 2 SHAKE, SLOW SPEED
171	GOBO 1 SHAKE, FAST SPEED
...	...
160	GOBO 1 SHAKE, SLOW SPEED
159	FAST ROTATION (100 rpm)
...	...
118	SLOW ROTATION (5 rpm)
114 - 117	STOP
113	SLOW ROTATION (5 rpm)
...	...
72	FAST ROTATION (100 rpm)
64 - 71	GOBO 8
56 - 63	GOBO 7
48 - 55	GOBO 6
40 - 47	GOBO 5
32 - 39	GOBO 4
24 - 31	GOBO 3
16 - 23	GOBO 2
8 - 15	GOBO 1
0 - 7	WHITE

• ROTATING GOBO CHANGE - channel 12



BIT	EFFECT
255	GOBO 6 SHAKE, FAST SPEED
...	...
235	GOBO 6 SHAKE, SLOW SPEED
234	GOBO 5 SHAKE, FAST SPEED
...	...
214	GOBO 5 SHAKE, SLOW SPEED
213	GOBO 4 SHAKE, FAST SPEED
...	...
193	GOBO 4 SHAKE, SLOW SPEED
192	GOBO 3 SHAKE, FAST SPEED
...	...
172	GOBO 3 SHAKE, SLOW SPEED
171	GOBO 2 SHAKE, FAST SPEED
...	...
151	GOBO 2 SHAKE, SLOW SPEED
150	GOBO 1 SHAKE, FAST SPEED
...	...
130	GOBO 1 SHAKE, SLOW SPEED
112-129	GOBO 6
...	...
93-111	GOBO 5
...	...
75-92	GOBO 4
...	...
56-74	GOBO 3
...	...
38-55	GOBO 2
...	...
19-37	GOBO 1
0-18	WHITE

• GOBO ROTATION - channel 13



BIT	EFFECT
255	FAST ROTATION (150 rpm)
193	SLOW ROTATION (2,2 rph)
191 - 192	STOP
190	SLOW ROTATION (2,2 rph)
128	FAST ROTATION (150 rpm)
127	540° POSITION
105	450° POSITION
84	360° POSITION
63	270° POSITION
42	180° POSITION
21	90° POSITION
0	0° POSITION

• GOBO FINE - channel 14



BIT
255
127
0

• PRISM INSERTION - channel 15

BIT	EFFECT
255	PRISM INSERTED
128	
127	PRISM EXCLUDED
0	

• PRISM ROTATION - channel 16



BIT	EFFECT
255	FAST ROTATION (120 rpm)
193	SLOW ROTATION (3 rph)
191 - 192	STOP
190	SLOW ROTATION (3 rph)
128	FAST ROTATION (120 rpm)
127	POSITION 540°
105	POSITION 450°
84	POSITION 360°
63	POSITION 270°
42	POSITION 180°
21	POSITION 90°
0	POSITION 0°

• FROST - channel 17



BIT	EFFECT
255	FROST INSERTED
0	FROST EXCLUDED

• BLADE UP 1 - channel: 18



BIT	EFFECT
255	BLADE IN
127	
0	BLADE OUT

• BLADE UP 2 - channel: 19



BIT	EFFECT
255	BLADE IN
127	
0	BLADE OUT

• BLADE DW 1 - channel: 20



BIT	EFFECT
255	BLADE IN
127	
0	BLADE OUT

• **BLADE DW 2 - channel: 21**



BIT	EFFECT
255	BLADE IN
127	
0	BLADE OUT

• **BLADE LF 2 - channel: 25**



BIT	EFFECT
255	BLADE IN
127	
0	BLADE OUT

**Important:**

The lamp automatically dim to half power in any condition in which the blades completely shut the light beam.

• **BLADE RG 1 - channel: 22**



BIT	EFFECT
255	BLADE IN
127	
0	BLADE OUT

• **FRAMING ROTATION - channel: 26**



BIT	EFFECT
255	
127	
0	

• **BLADE RG 2 - channel: 23**



BIT	EFFECT
255	BLADE IN
127	
0	BLADE OUT

• **FOCUS - channel 27**



BIT	EFFECT
255	NEAR
0	DISTANT

• **BLADE LF 1 - channel: 24**



BIT	EFFECT
255	BLADE IN
127	
0	BLADE OUT

• **FOCUS FINE - channel 28**



BIT	EFFECT
255	NEAR
0	DISTANT

• ZOOM - channel: 29



BIT	EFFECT
255	NARROW BEAM
0	WIDE BEAM


• AUTOFOCUS DISTANCE - channel 30

**AUTOFOCUS priority:**

- 1 - Blades
- 2 - Rotating Gobo
- 3 - Static Gobo
- 4 - Iris

BIT	EFFECT
255	100 METRES
128	50 METRES
102	40 METRES
77	30 METRES
51	20 METRES
26	10 METRES
7	3 METRES
0-6	AUTOFOCUS OFF

• AUTOFOCUS ADJUSTMENT - channel 31




BIT	EFFECT
255	FOCUS FINE
128	
0	FOCUS FINE

• MACRO EFFECTS - channel 32


BIT	EFFECT
232-255	STAND BY BLACK
220-231	RANDOM MACRO 8
208-219	RANDOM MACRO 7
196-207	RANDOM MACRO 6
184-195	RANDOM MACRO 5
172-183	RANDOM MACRO 4
160-171	RANDOM MACRO 3
148-159	RANDOM MACRO 2
136-147	RANDOM MACRO 1
112-135	STAND BY BLACK
100-111	MACRO 8
88-99	MACRO 7
76-87	MACRO 6
64-75	MACRO 5
52-63	MACRO 4
40-51	MACRO 3
28-39	MACRO 2
16-27	MACRO 1
12-15	STAND BY BLACK
8-11	STAND BY
0-7	MACRO OFF

• PAN - channel 33

Operation with option InvertPan  $\diamond$  Off  
(Tilt conventionally represented at 35 bit and option Invert Tilt  $\diamond$  Off)

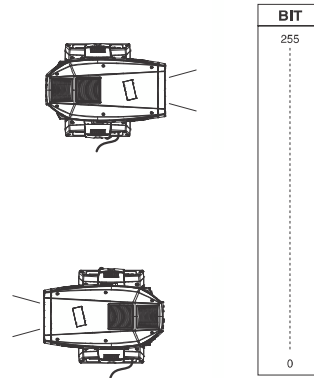


Operation with option InvertPan  $\diamond$  On  
(Tilt conventionally represented at 35 bit and option Invert Tilt  $\diamond$  Off)

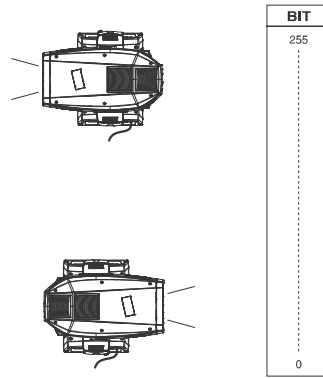


• PAN FINE - channel 34

Operation with option InvertPan  $\diamond$  Off  
(Tilt conventionally represented at 35 bit and option Invert Tilt  $\diamond$  Off)

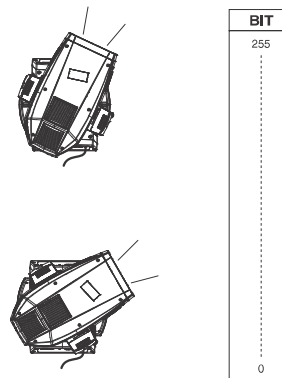


Operation with option InvertPan  $\diamond$  On  
(Tilt conventionally represented at 35 bit and option Invert Tilt  $\diamond$  Off)

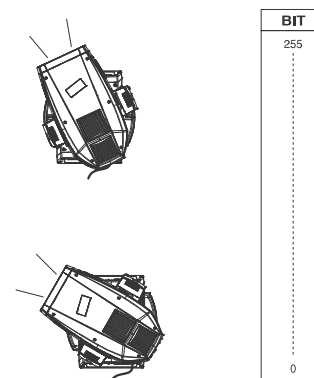


• **TILT - channel 35**

Operation with option Invert Tilt  $\diamond$  Off  
 (Pan conventionally represented at 0 bit and option Invert Pan  $\diamond$  Off)

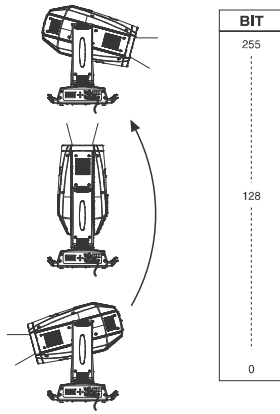


Operation with option Invert Tilt  $\diamond$  On  
 (Pan conventionally represented at 0 bit and option Invert Pan  $\diamond$  Off)

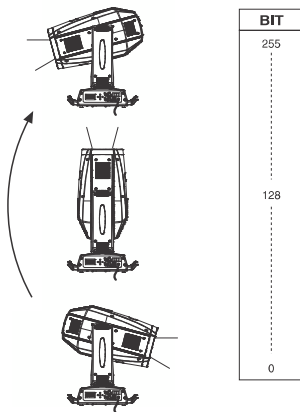


• **TILT FINE - channel 36**

Operation with option Invert Tilt  $\diamond$  Off  
 (Pan conventionally represented at 0 bit and option Invert Pan  $\diamond$  Off)

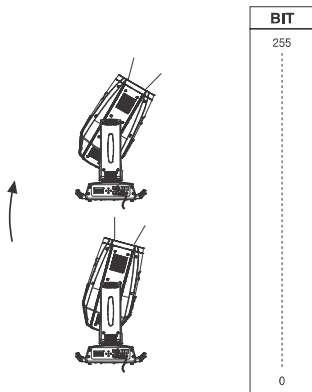

Operation with option Invert Tilt  $\diamond$  On  
 (Pan conventionally represented at 0 bit and option Invert Pan  $\diamond$  Off)

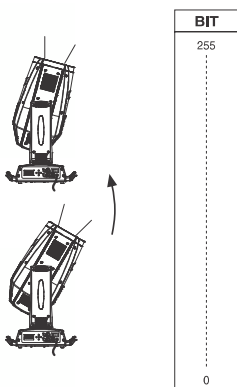

• **FUNCTION - channel: 37**

BIT	EFFECT	
255	UNUSED RANGE	
...		
63		
51-62		DIMMER CURVE FUNCTION
38-50		
25-37	PAN-TILT FUNCTION	
12-24		FAST (Default)
0-11	UNUSED RANGE	

The functions are activated passing through unused range and staying 5 seconds in necessary level.

• **RESET - channel: 38**


BIT	EFFECT
255	COMPLETE RESET
...	Complete reset is activated passing through the unused range and staying 5 seconds in complete reset levels.
128	
127	PAN / TILT RESET
...	Pan / Tilt reset is activated passing through the unused range and staying 5 seconds in Pan / Tilt reset levels.
77	
76	EFFECTS RESET
...	Effects reset is activated passing through the unused range and staying 5 seconds in Effects reset levels.
26	
25	UNUSED RANGE
0	

The functions are activated passing through unused range and staying 5 seconds in necessary level.

• **LAMP CONTROL (only with option LAMP DMX On) - channel: 39**

**IMPORTANT:** Alpha Profile 1500 is not provided with hot restrike igniter

BIT	EFFECT
255	LAMP ON (1500W)
...	Lamp ignition after 5 s in full power levels. Immediate transition from half to full power.
180	
179	LAMP ON (1200W)
...	Immediate transition from full to half power. Lamp ignition not allowed in half power.
101	
100	LAMP OFF
...	Lamp switch off passing through the unused range and staying 5 s in Lamp OFF levels.
26	
25	UNUSED RANGE
0	



The functions are activated passing through unused range and staying 5 seconds in necessary level.

## TIMING CHANNELS

	Timing Channel	Channel function
40	Pan - Tilt time	Pan – Tilt – Pan Fine – Tilt Fine
41	Colour time	Cyan - Magenta - Yellow – C.T.O. – Color wheel
42	Beam time	Dimmer – Zoom – Focus – Frost/Prism – Iris - Framing Rotation
43	Gobo time	Fix Gobo –Rotating Gobo change

## TIME TABLE

BIT	Seconds	BIT	Seconds	BIT	Seconds	BIT	Seconds	BIT	Seconds	BIT	Seconds
0	Full	43	8.6	86		129		172		216	
1	0.2	44	8.8	87	24	130	41	173	58	217	170
2	0.4	45	9	88		131		174		218	
3	0.6	46	9.2	89	25	132	42	175	59	219	180
4	0.8	47	9.4	90		133		176		220	
5	1	48	9.6	91	26	134	43	177	60	221	190
6	1.2	49	9.8	92		135		178		222	
7	1.4	50	10	93	27	136	44	179	65	223	200
8	1.6	51	10.2	94		137		180		224	
9	1.8	52	10.4	95	28	138	45	181	70	225	210
10	2	53	10.6	96		139		182		226	
11	2.2	54	11	97	29	140	46	183	75	227	220
12	2.4	55	12	98		141		184		228	
13	2.6	56	13	99	30	142	47	185	80	229	230
14	2.8	57	14	100		143		186		230	
15	3	58	15	101	31	144	48	187	85	231	240
16	3.2	59	16	102		145		188		232	
17	3.4	60	17	103	32	146	49	189	90	233	250
18	3.6	61	18	104		147		190		234	
19	3.8	62	19	105	33	148	50	191	95	235	260
20	4	63	20	106		149		192		236	
21	4.2	64	21	107	34	150	51	193	100	237	270
22	4.4	65	22	108		151		194		238	
23	4.6	66	23	109	35	152	52	195	110	239	280
24	4.8	67	24	110		153		196		240	
25	5	68	25	111	36	154	53	197	120	241	290
26	5.2	69	26	112		155		198		242	
27	5.4	70	27	113	37	156	54	199	130	243	300
28	5.6	71	28	114		157		200		244	
29	5.8	72	29	115	38	158	55	201	140	245	280
30	6	73	30	116		159		202		246	
31	6.2	74	31	117	39	160	56	203	150	247	290
32	6.4	75	32	118		161		204		248	
33	6.6	76	33	119	40	162	57	205	160	249	310
34	6.8	77	34	120		163		206		250	
35	7	78	35	121	41	164	58	207	170	251	310
36	7.2	79	36	122		165		208		252	
37	7.4	80	37	123	42	166	59	209	180	253	310
38	7.6	81	38	124		167		210		254	
39	7.8	82	39	125	43	168	60	211	190	255	Follow cue Data
40	8	83	40	126		169		212			
41	8.2	84	41	127	44	170	61	213	200		
42	8.4	85	42	128		171		214			
								215			