
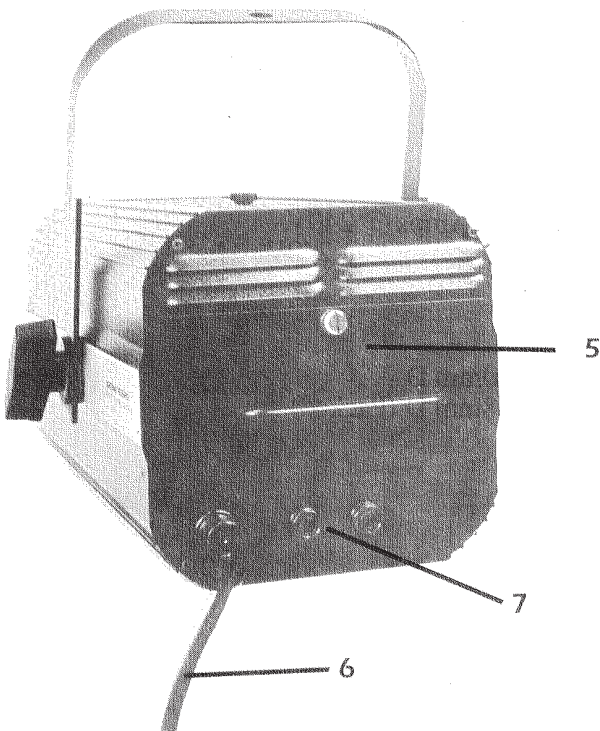
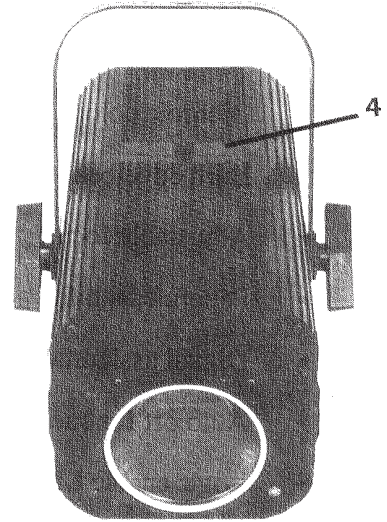


## CONTROLLER SPECIFICATIONS

- 9 Memories - 99 Pages each
- Remote Page interface
- Page crossfade
- Music color synthesis
- 16 channels
- Master dimmer
- Remote enable
- Editing functions
- Master/Slave function
- Region lockout
- Positive feel switches
- RS-232 computer backup
- Stereo Audio input
- Security keylock
- 19" rack mount - 3 units
- Voltage - 120V / 240V
- Fuse - 1A 5mm x 20mm Slow Blow @ 120V - 1/2A @ 240V
- Current - 1/2 Amp @ 120V - 1/4 Amp @ 240V
- Weight - 5.9kg (6.9kg packed)
- Dimensions - 133mm H x 482mm W x 203mm D  
330mm H x 558mm W x 330mm D (Packed)

*specifications subject to change without prior notice*

## LUMINAIRE ILLUSTRATION

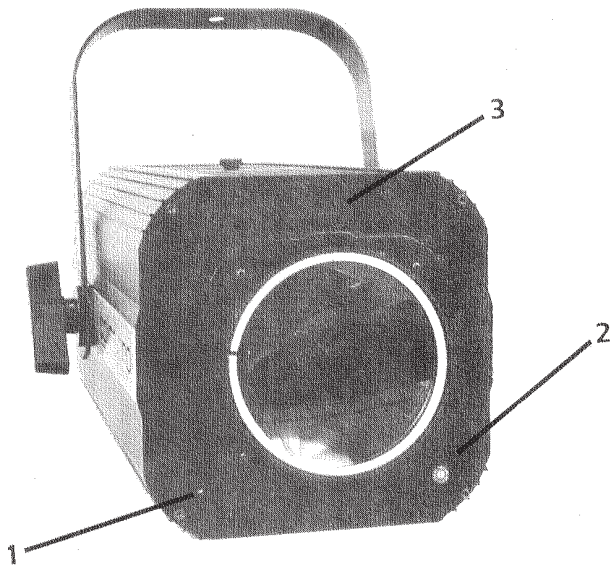

## LUMINAIRE DESCRIPTION

- 1) LED - Logic and fan enable indicator
- 2) DIGITAL REGION SELECTOR
- 3) LENS CLAMPING SCREW
- 4) GOBO SLOT
- 5) LAMP SERVICE DRAWER
- 6) MAINS CORD
- 7) 1/4" (3 WAY) INPUT/OUTPUT CONNECTOR

## LUMINAIRE SPECIFICATIONS

- Dichroic color change system
- Hard edge beam - Fresnel lens available
- Adjustable focus
- Pattern capability
- Digital assignment selector
- Auto off function
- Logic enable LED
- Electronic over temperature protector
- MRI6 lamp technology
- Easy lamp replacement
- Lightweight aluminum construction
- Voltage - 120V / 240V (selected at factory)
- Fuse - 10A 5mm x 20mm Fast Blow @ 120V / 7A @ 240V
- Wattage - 750w total (3) 250w ENH lamps  
900w total (3) 300w ELH lamps
- Current - 6 Amps @ 120V (ENH) - 4.5 Amps @ 240V  
7.5 Amps @ 120V (ELH) - 5.5 Amps @ 240V
- Weight - 5.5kg (6.5kg Packed)
- Dimensions - 180mm H x 190mm W x 450mm D  
330mm H x 330mm W x 558mm D (Packed)

*specifications subject to change without prior notice*