



NOCTURNE™ 500W & 1000W CODA™ 500W & 1000W

Nocturne


- ❑ Single unit symmetric distribution floodlight
- ❑ For general internal floodlighting
- ❑ In two versions: 500W and 1000W
- ❑ Wide, even distribution
- ❑ Barndoor option
- ❑ Supplied in black finish with lamp, colour frame, integral wire safety mesh, mounting fork with M10 wingnut and bolt, 1.5m cable with plug
- ❑ Available as either 240V version (with 240V lamp and 15A plug) or 230V version (with 230V lamp and Schuko plug)




Coda

- ❑ Single unit and compartment cyclorama floodlights with asymmetric distribution
- ❑ For even coverage of backcloths and cycloramas
- ❑ In two versions: 500W and 1000W
- ❑ Wide, asymmetric distribution


**Coda 500W
Nocturne 500W**




**Coda 1000W
Nocturne 1000W**



Coda 500W/3

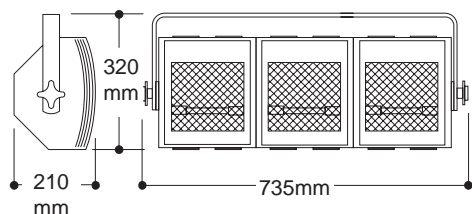

Coda 500W/4

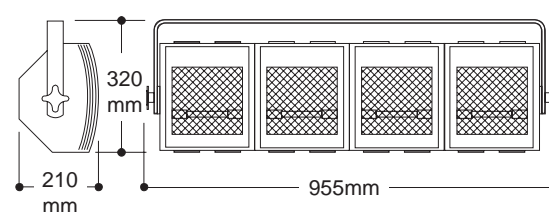

Weights and dimensions

	Nocturne 500	Nocturne 1000	Coda 500/1	Coda 500/3	Coda 500/4	Coda 1000
Weight	3.80kg	4.3kg	3.80kg	8.4kg	11.0kg	4.3kg
Packed Wt	4.5kg	5.0kg	4.5kg	9.2kg	11.5kg	5.0kg
Packed Vol	0.027m ³	0.033m ³	0.027m ³	0.073m ³	0.095m ³	0.033m ³
Filter Cut Size	Nocturne & Coda 500, 500/3, 500/4: 214 x 240mm			Nocturne & Coda 1000: 285 x 240mm		
	Nocturne & Coda 500, 500/3, 500/4: 214 x 240mm			Nocturne & Coda 1000: 285 x 240mm		



Photometric data

Typical performance based on 500W K1 240V lamp (Nocturne and Coda 500) and 1000W K4 240V lamp (Nocturne and Coda 1000)


At 5.5m hanging. 45° angle. 1.5m from cyclorama on 1.5m centres*
 Floor level 45° angle. 1.5m from cyclorama on 1.5m centres**

Coda

Cyc Height (metres)	1	2	3	4	5	6
500W*	480	760	990	1000	1000	700
1000W**	2050	1760	1100	580	360	270


Nocturne 500

Distance (m)	1	2	3	4	5	6
Beam Ø(m)	1.16	2.33	3.49	4.66	5.83	6.99
Illum (lux)	4232	1028	470	264	169	117

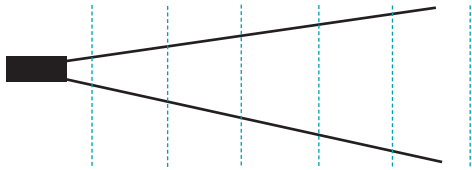

Nocturne 1000

Distance (m)	1	2	3	4	5	6
Beam Ø(m)	1.36	2.72	4.09	5.45	6.82	8.18
Illum (lux)	8297	2074	922	518	331	230

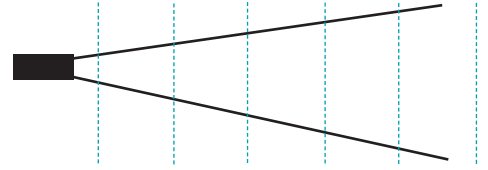

Peak Intensity, 1/2 Peak and 1/10 Peak

	1/2 Pk	1/10 Pk	Pk. Candelas
Nocturne 500W	60.5	95.8	4232
Nocturne 1000W	68.6	99.5	8297

For performance at any distance divide candela by distance²

For performance of Coda 1000W unit refer to your Strand Lighting dealer



Ordering information

Nocturne 500

Wide-angle, general purpose single unit 500W floodlight. Supplied with K1 500W lamp.

Cat No	Description
--------	-------------

14104	Nocturne 500W, 240V lamp, 15A plug
14103	Nocturne 500W, 230V lamp, Schuko plug

Nocturne 1000

Wide-angle, general purpose single unit 1000W floodlight. Supplied with K4 1000W lamp.

Cat No	Description
--------	-------------

14114	Nocturne 1000W, 240V lamp, 15A plug
14113	Nocturne 1000W, 230V lamp, Schuko plug

Coda 500

Wide-angle 500W floodlight in single, 3 or 4 compartment units for even top or bottom lighting of up to 6m cycloramas when used 1.5m from backdrop, and on 1.5m centres. Supplied with 500W K1 lamp(s).

Cat. No.	Description
----------	-------------

14014	Coda 500/1 500W cyclight, 240V lamp, 15A plug
14013	Coda 500/1 500W cyclight, 230V lamp, Schuko plug
14034	Coda 500/3 500W, 3-unit, 240V lamps
14033	Coda 500/3 500W, 3-unit, 230V lamps
14044	Coda 500/4 500W, 4-unit, 240V lamps
14043	Coda 500/4 500W, 4-unit, 230V lamps

Coda 1000

Wide-angle 1000W single unit floodlight for even top or bottom lighting of cycloramas. Supplied with 1000W K4 lamp. Optional outrig colour frame accessory.

Cat. No.	Description
----------	-------------

14024	Coda 1000 W Cyclight, 240V lamp, 15A plug
14023	Coda 1000 W Cyclight, 230V lamp, Schuko plug

Coda/Nocturne Accessories

Cat. No.	Description
----------	-------------

44014	Additional K1 500W 240V lamp	18123	Additional colour frame, 500W
44013	Additional K1 500W 230V lamp	18124	Additional colour frame, 1000W
44044	Additional K4 1000W 240V lamp	18125	Outrig colour frame 1000W
44043	Additional K4 1000W 230V lamp	83100	Cable gland, Coda 3 & 4 cyclights
18121	Barndoor, 500W	83010	9 core 1.5mm cable, Coda 3 & 4
18122	Barndoor, 1000W	82010	Hook Clamp
		82000	Safety cable, light duty (up to 16kg)

Operational features

Lamp access

Through the front of each unit or compartment via hinged wireguard with positive spring retention clip

Beam shaping

On single units only, 4-leaf barndoors

Tilt/Pan

Heat insulated hand knob on right side of luminaire. Single units: M10 bolt through top of fork. Multiple units: Swivel crossbar and M10 bolt.

Electrical & mechanical data

Construction

Pressure diecast zinc alloy end sections common to all luminaires joined by machine threaded screws to pressed sheet steel housing. High temperature stoved epoxy powder coat in black.

Anchorage provided for safety bond.

Mounting and suspension

Single units: Fork of aluminium alloy, reversible, with 70mm diameter friction disk and heat insulated hand knob. Fork threaded and supplied with M10 bolt, washer and wingnut Coda 500/3 & 500/4. Fitted with reversible 'L' forks, dual top suspension fork/groundnut tilt foot each with 70mm diameter friction disk and hand knob (Two hook clamps required for hanging unless swivel cross-bar is used).

Supply voltage

230/240 volts 50/60 Hz

Standards

Designed to conform to EN 60-598 2-17

The Company reserves the right to make any variation in design or construction to the equipment described. © Strand Lighting Ltd 1998.

Strand™, Strand Lighting™, Strand Quartzcolor™ are trade marks of Strand Lighting Limited and Strand Lighting Inc.

Strand Lighting Ltd North Hyde House Hayes Rd Heston Middx UB2 5NL UK Tel: +44 (0)181 571 3588 Fax: +44 (0)181 571 3305

Strand Lighting GmbH Ullsteinstrasse 114-142 D-12109 Berlin Germany Tel: +49 (0) 30/70 79 51 0 Fax: +49 (0) 30/70 79 519 9

Strand Lighting Italia srl Via delle Gardenie 33 00040 Pomezia-Roma Italy Tel: +39 06 9147123 Fax: +39 06 9147136

Strand Lighting Asia Ltd 7/F Corporation Square 8 Lam Lok Street Kowloon Bay Hong Kong Tel: +852 2757 3033 Fax: +852 2757 1767

LONDON - BERLIN - ROME - PARIS - MOSCOW - LOS ANGELES - NEW YORK - TORONTO - HONG KONG